ROBUST

Strengthened connecting shaft and multi-hole bolt-on plate

SIMPLE

Low crank forces make it easy to operate

ECONOMICAL

Low maintenance and comparatively light for more payload






BPW IS THE RIGHT CHOICE

Technical data

(per set)

Lifting capacity	24 t					
static load capacity	50 t					
Stroke per crank turn						
Low gear	0.8 mm					
High gear	9.6 mm					
Crank force at 16 t	175 N					

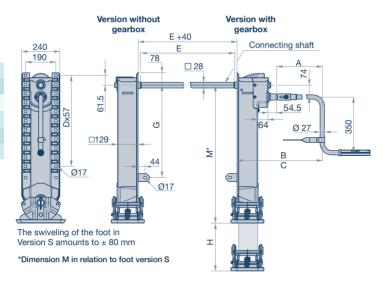

BPW landing leg

Length M	Dimension H	Dimension G	No. of Mounting Holes	Weight	Landing Leg Kit	Kit Components Part Numbers	
700	355	430	8	89kg	023710KIT700S-2	02.3710.63.01	Geared leg with S type foot
						02.3710.62.01	Non geared leg with S type foot
						02.1404.31.01	Handle 450mm with holder
						02.4307.10.01	Connecting shaft 1,500mm
800	455	530	9	97kg	023710KIT800S-2	02.3710.33.01	Geared leg with S type foot
						02.3710.32.01	Non geared leg with S type foot
						02.1404.31.01	Handle 450mm with holder
						02.4307.10.01	Connecting shaft 1,500mm
850	505	580	10	101kg	023710KIT850S-2	02.3710.43.01	Geared leg with S type foot
						02.3710.42.01	Non geared leg with S type foot
						02.1404.31.01	Handle 450mm with holder
						02.4307.10.01	Connecting shaft 1,500mm

*Crank Holder: 02.1408.03.00

Please note: Landing legs are supplied as Landing Leg Kits. When ordering spare parts, please use the individual Kit Components Part Numbers.

YNUR ANVANTAGES AT A GLANCE:

···O ROBUST

Just the right thing for usage in heavy jobs with a trailer, thanks to the reinforced shaft for the absorption of lateral forces and the continuous screw-on plate for optimum strength. And all with built-in safety.


·· SIMPLE

The long, continuously perforated screw-on plate for different fixing positions ensures an easy, flexible installation. The low crank forces ensure less operator fatigue during operation.

••• ECONOMICAL

Advantages that pay off: BPW landing leg's are particularly light – and therefore the first choice, if every kilo of vehicle load makes a difference. BPW landing gear is maintenance-free for one year due to the long-term greasing with BPW ECO Li 91. In addition, it impresses with the lowest level of wear and is optimally protected from corrosion through high-quality coatings.

Support feet (without landing legs)

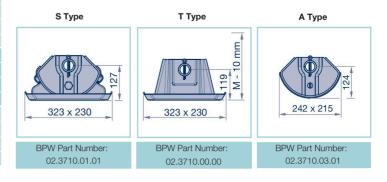

**S Type feet are supplied with all kits as standard. Other feet types available on request

